

# HL265/HL275

all stainless steel checkweighers - protection where you need it



stainless steel scales for the food industry

**Avery Weigh-Tronix**


# models HL265 & HL275 checkweighers

## - protection where you need it

The **HL265** and **HL275** are a series of bench checkweighers particularly suited to the food industry. Capacities range from 1 kg up to 90 kg, with EU Trade Approval to 3000 divisions on the **HL265**, or non-approved to 6000 divisions on either model.

### Protection where you need it -

- ◆ **In The Workplace** - The scale is fully stainless steel, including the load cell, and sealed to IP66 (NEMA 4X) for added protection in washdown environments.
- ◆ **In The Scale Base** - A 'Breakaway Load Transfer System' transfers shock loads and overloads away from the load cell, for added protection and reliability, giving up to 500% overload protection.
- ◆ **In the Pocket** - The rugged reliability comes to you at a very competitive price. A rapid-response display combines with the scale's superior accuracy to minimise your 'give-away'.

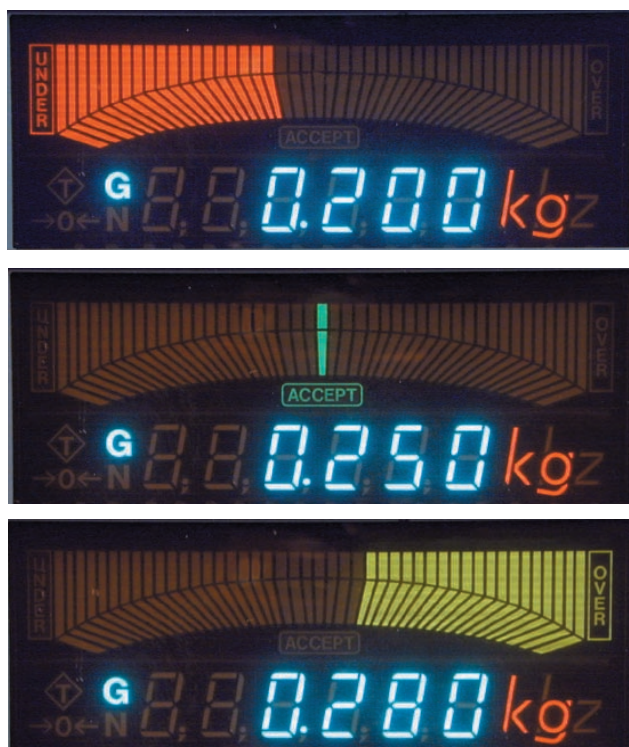

### Specification

| Capacity                 | *1 kg     | 3 kg  | 6 kg      | 15 kg | 30 kg     | 45 kg | 90 kg     |
|--------------------------|-----------|-------|-----------|-------|-----------|-------|-----------|
| Sensitivity              |           |       |           |       |           |       |           |
| Non-approved             | 0.2 g     | 0.5 g | 1 g       | 2 g   | 5 g       | 10 g  | 20 g      |
| †Approved                | -         | 1 g   | 2 g       | 5 g   | 10 g      | 20 g  | 50 g      |
| Pan size (mm)<br>(W x D) | 220 x 220 |       | 350 x 310 |       | 508 x 508 |       | 610 x 610 |

\* Model HL275 only.

† Only model HL265 has approved specification.

- ◆ **Display type:** 7-segment LCD or LED.
- ◆ **Units:** kg, g, lbs, oz.
- ◆ **Displays:** **Model HL265:** 13 mm vacuum fluorescent or 17 mm LCD (essential if battery operation required). Three coloured LED's for Over/Under checkweighing.

**Model HL275:** 13 mm vacuum fluorescent. Multi-coloured 45-segment graphics display for Over/Under checkweighing.

- ◆ **Power Supply:** 110 or 240 volts AC.
- ◆ **Battery Option:** 12 V DC for LCD version of Model **HL265** only. With 30 hours battery life, 14 hour re-charge time. Power-preserving shut down and low battery warning.
- ◆ **Column Option:** Both models are available with either a low head (135 mm to centre of display) or a column-mounted head (310 mm to centre of display). Remote head versions are also available.
- ◆ **Data Output Option:** An RS232 is available for all models.

Left: HL275 display illustrating Under, Accept & Over LCDs.

© Avery Weigh-Tronix group of companies 2008. All rights reserved. Avery Weigh-Tronix is a registered trade mark of the Avery Weigh-Tronix group of companies. This publication is issued to provide outline information only which, unless agreed by an Avery Weigh-Tronix group company in writing, may not be regarded as a representation relating to the products or services concerned. This publication was correct at the time of going to print however, Avery Weigh-Tronix reserves the right to alter without notice the specification, design, price or conditions of supply of any product or service at any time.

Your local distributor:

## Avery Weigh-Tronix

E mail: [info@awtxglobal.com](mailto:info@awtxglobal.com)  
 Internet: <http://www.averyweigh-tronix.com>

Foundry Lane, Smethwick,  
 West Midlands, England B66 2LP.  
 Tel: +44 (0)845 3 66 77 88 Fax: +44 (0)121-224 8183