

DGT4X

DGT4X - HIGH SPEED WEIGHT TRANSMITTER



Weight transmitter for weight transfer to PLC via fieldbus, analog output or RS485. It allows the reading and diagnostics of each load cell or each connected scale.

Available versions:

PROFINET I/O | ETHERNET/IP | ETHERCAT |
MODBUS TCP | CANOPEN | DEVICENET |
PROFIBUS | ANALOG OUTPUT | RS485

Integrated WebServer as standard for
configuration, diagnostics and data backup.

The best solution
for advanced industrial
applications

What's new compared to DGT4


- New cutting-edge processor, able to process up to 2600 weight readings per second. The high speed allows an extremely accurate weight filtering even with weighing times in the order of milliseconds.
- New cell feed circuit for greater weighing stability.
- Power supply circuit with protections, specific for industrial environments.
- Removable terminal blocks to simplify wiring in the electrical panel.
- Frontal micro-USB communication port for configuration, diagnostics and data backup.
- XSPEED TOOL: New PC software with oscilloscope function for system diagnostics and weighing filter optimization.
- 14.2 mm display.
- New configuration menu to simplify calibration and configuration.
- RS485 communication port always available on all versions.
- Up to 120 fieldbus updates per second.

ONBOARD WEB SERVER

- The integrated WEB SERVER allows complete diagnostics, calibration and remote configuration of the weight transmitter from the Ethernet network.
- *Only for PROFINET, ETHERNET/IP and MODBUS TCP/IP models.*

PC XSPEED TOOL SOFTWARE

- Specific program for PC, designed to improve the performance of any weighing system.
- Customization of the weighing filter, to maximize the speed and accuracy of the weighs in static and dynamic applications.
- Graphical weighing analysis for the identification of mechanical disturbances and vibrations.

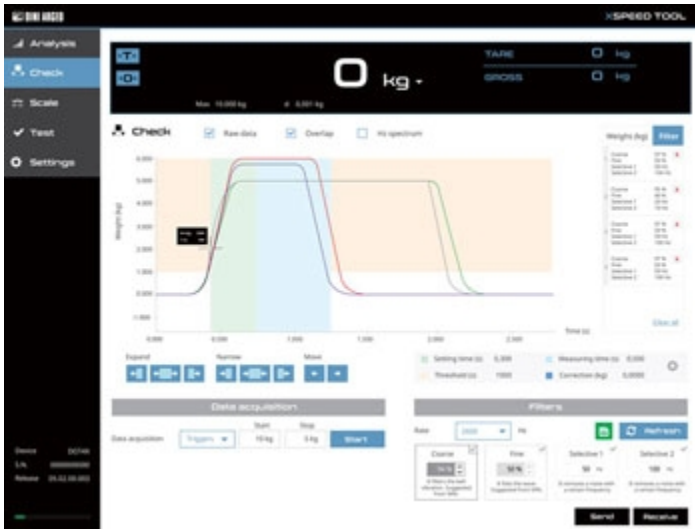


TECHNICAL FEATURES

- Power supply: 12-24Vdc
- Converter: A/D 24 bit with 4 channel
- Max scale number: 4
- Load cells connection: 4 or 6 wires (with sense)
- Operating modes:
 - Digital junction box
 - Multi-scale transmitter
 - Single-scale transmitter
- Conversion rate: up to 3200 conv./sec
- Selectable sampling rate: up to 2600 conv./sec
- Fieldbus update rate: up to 120 Hz
- Displaying: up to 1.000.000d
- Signal sensitivity: 0,03 $\mu\text{V/d}$ (0,3 $\mu\text{V/e}$)
- Resolution: 3.000.000 counts
- Linearization: up to 8 points
- Connectable load cells: up to 16 350 Ω cells
- Fieldbus: Profibus, Profinet, EthernetIP, EtherCAT, EthernetIP, CANopen, DeviceNet, Modbus TCP/IP.
- Serial ports:
 - 1 Micro-USB port (device) for PC configuration with "Dinitools®" and "XSpeed Tool".
 - 1 RS485 port
 - 1 RS232 port (Mod. DGT4X / DGT4XAN)
- Analog output: 16 bit (DGT4XAN Model) 4-20mA or 0-10Vdc.
- Digital outputs: n. 2 configurable OUTPUTS
- Digital inputs: n. 2 configurable INPUTS
- Certifications:
 - OIML R76 (10000e or 3000 + 3000e) / R51 / R61 MID
 - UL Listed (upon request)
 - EU Type Examination Certificate (45501:2015)
- Case: ABS, for Din bar (106 x 56 x 118 mm)
- Calibration:
 - Theoretical (mV\V)
 - With sample weights
 - Remotely by WEB SERVER
 - From the keyboard
 - From PC with "Dinitools"
- Keyboard functions:
 - Zeroing, Tare, Function mode, Manual data printing/sending, ON/Stand-by
- Program functions:
 - Setpoint, High resolution, Peak, Alibi Memory, Unit of measure conversion
- Keyboard: mechanical with 5 digits
- Display: 14,2mm red LED

DETAIL 1




DIGITAL EQUALISATION BOX MODE

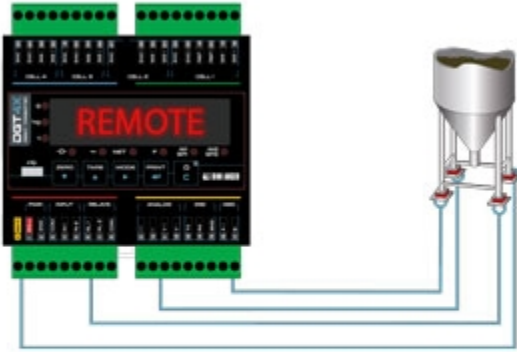

DETAIL 2



4 SCALES MODE

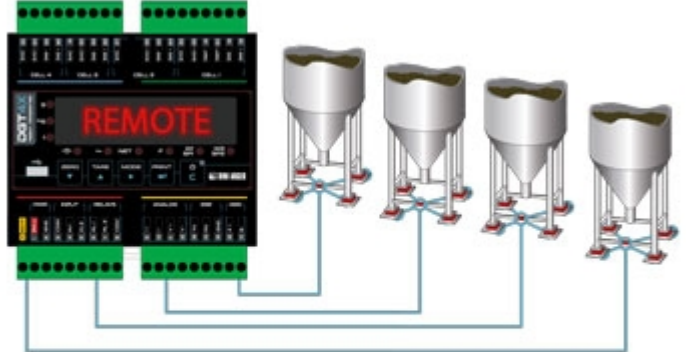

DETAIL 3

Home Sign out Change password Release 1.3

Profile	Factor	SW	UNIT	Parameter	UNIT
1	GROSS		NET	TARE	UNIT
1	508		508	0	kg

ADC: none

PARAMETERS	CALIBRATION	COMMANDS
Unit: kg	Cal points: 1	KEYBOARD LOCK
Decimals: 0	Weight: ADC	KEYBOARD UNLOCK
Capacity 1: 10000	Zero: 0	SCALE REBOOT
Capacity 2: 0	Point 1: 10000	WRITE PARAMETERS
Division 1: 1	Point 2: 0	WRITE SETPOINTS
Division 2: 1	Point 3: 0	

SETPOINTS

Setpoint 1 on:

Setpoint 1 off:

Setpoint 2 on:

Setpoint 2 off:



PHOENIX SCALES LTD

34 OLDBURY ROAD WEST MIDLANDS - B70 9ED - WEST BROMWICH - UNITED KINGDOM

Tel. 0044 121 520 9048

Fax. 0044 121 557 4006

E-mail sales@phoenixscales.co.uk

Web www.phoenixscales.co.uk